

Egenskaper



Specifikationer



50Hz

ouppvärm�		
Modell	Nominellt luftflöde (m ³ /h)	Rekommenderad installationshöjd (m)
ARIS 1000 A	-	-
ARIS 1500 A	2150	2,2-2,8
ARIS 2000 A	2900	2,2-2,8

elvärm�				
Modell	Nominellt luftflöde (m ³ /h)	Elektrisk värmekapacitet 230Vx1 (kW)	Elektrisk värmekapacitet 400Vx3 (kW)	Rekommenderad installationshöjd (m)
ARIS 1000 E-9	1500	-	3/6/9	2,2-2,8
ARIS 1000 E	1800	-	3/6/9	2,5-3,5
ARIS 1500 E	2150	-	3/6/9	2,2-2,8
ARIS 2000 E	2900	-	3,8/7,5/11,3	2,2-2,8
ARIS 1000 E230	1500	1,9/3,8/5,6	-	2,2-2,8
ARIS 1500 E230-6	2150	1,9/3,8/5,6	-	2,2-2,8
ARIS 1500 E230-9	2150	3/6/9	-	2,2-2,8
ARIS 2000 E230	2900	3,8/7,5/11,3	-	2,2-2,8

Vattenvärm�			
Modell	Nominellt luftflöde (m ³ /h)	Värmekapacitet 80/60°C (kW)	Rekommenderad installationshöjd (m)
ARIS 1000 P86	1750	9,32	2,5-3,5
ARIS 1500 P	2100	12,7	2,2-2,8
ARIS 2000 P	2750	16,7	2,2-2,8

Dimensioner

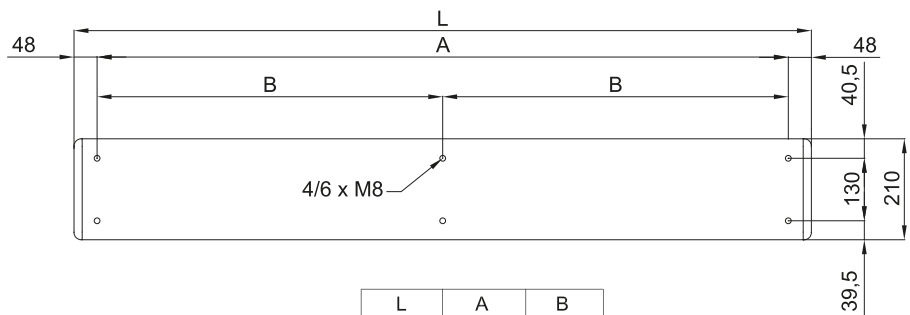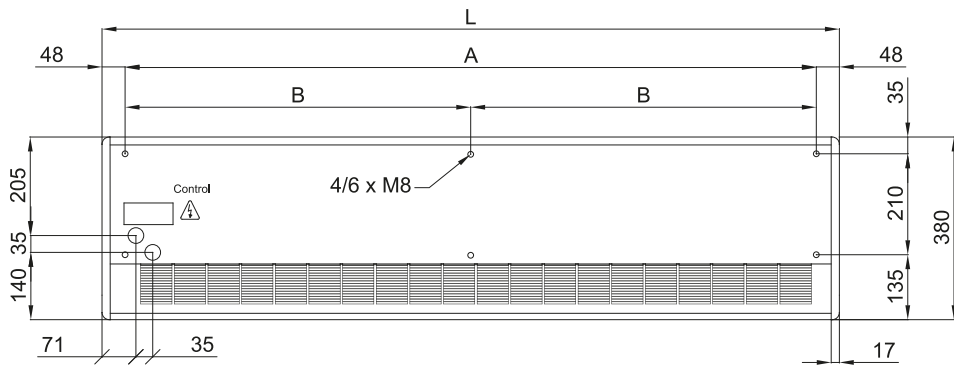

	L	A	B
Aris 1000	1034	940	-
Aris 1500	1534	1440	-
Aris 2000	2034	1940	970