
Egenskaper

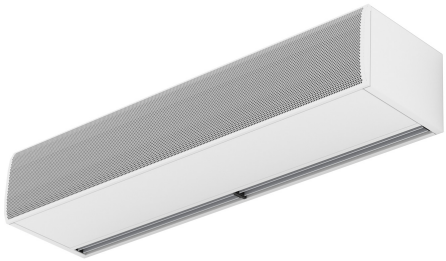


- "Speciellt designad för insektskontroll vid ingångar för t.ex. livsmedelsföretag och industrier, sjukhus eller sterila områden. Luftridåer med höga hastigheter för att förhindra flygande insekter att komma in i byggnaden. Upp till 2,3 meters höjd på dörrar i enlighet med NSF37-standarden.
- Självständig konstruktion gjord av galvaniserad stål, målad med strukturell vit epoxy-polyesterfärg RAL9016 som standardAndra färger eller rostfritt stål är tillgänglig vid efterfrågan
- Stor fasetterad insugskydd som undviker höga underhållskrav
- Anodiserad uttag i aluminium, luftfolieformade, går att ställa in mellan 0 till 15º på varje sida
- EC Double-inlet centrifugal fans driven by an external rotor motor and low noise level, with very low consumption efficency fans.
- "A"-typ utan uppvärmning, endast luft.
- Advanced Plug&Play control. Includes: Advanced PRO control with LCD display and integrated thermostat, door contact, 7m and remote control. With integrated functions: door delay (configurable); interface mode; operation, alarm and maintenance warning signals; and multiple digital inputs that modify the air curtain's operation.
- Includes protective varnish for the electronic board and control.
- Optional:
  • Auxiliary temperature sensors that improve air curtain control and increase energy savings.
  • Clever PRO intelligent control (automatic, programmable, ModBus via PLC, timer, etc.) with an additional temperature sensor.


Specifikationer

50Hz

Modell	ouppvärmd	
	(m³/h)	(m)
FLY KSB 1000 A	2.3	
FLY KSB 1500 A	2.3	
FLY KSB 2000 A	2.3	
FLY KSB 2500 A	2.3	
FLY KSB 3000 A	2.3	

Dimensioner



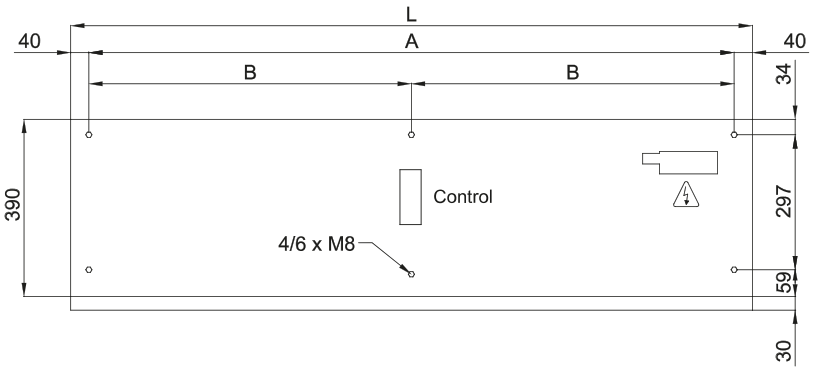

L	A	B
1000	920	-
1500	1420	710
2000	1920	960
2500	2420	1210
3000	2920	1460

