

Egenskaper



Specifikationer

50Hz

Värmepump - DX 1:1				
Modell	Nominellt luftflöde (m³/h)	Utomhusenhet 230Vx1	Utomhusenhet 400Vx3	Rekommenderad installationshöjd (m)
IECG 1500 DX14S-PA	2920	U-125PZH3E5	U-125PZH3E8	3-4,2
IECG 1500 DX14E-PA	2920	U-140PZ3E5	U-140PZ3E8	3-4,2
IECG 2000 DX22-PA	4380	-	U-200PZH3E8	3-4,2
IECG 2500 DX28-PA	5110	-	U-250PZH3E8	3-4,2



Värmepump - VRF		
Modell	Nominellt luftflöde (m³/h)	Rekommenderad installationshöjd (m)
IECG 1500 VRF13-PA	2920	3-4,2
IECG 1500 VRF15-PA	2920	3-4,2
IECG 2000 VRF20-PA	4380	3-4,2
IECG 2000 VRF24-PA	4380	3-4,2
IECG 2500 VRF25-PA	5110	3-4,2
IECG 2500 VRF29-PA	5110	3-4,2

60Hz


Värmepump - DX 1:1				
Modell	Nominellt luftflöde (m³/h)	Utomhusenhet 230Vx1	Utomhusenhet 400Vx3	Rekommenderad installationshöjd (m)
IECG 1500 DX14S-PA	2920	U-125PZH3E5	U-125PZH3E8	3-4,2
IECG 1500 DX14E-PA	2920	U-140PZ3E5	U-140PZ3E8	3-4,2
IECG 2000 DX22-PA	4380	-	U-200PZH3E8	3-4,2
IECG 2500 DX28-PA	5110	-	U-250PZH3E8	3-4,2

Värmepump - VRF		
Modell	Nominellt luftflöde (m³/h)	Rekommenderad installationshöjd (m)
IECG 1500 VRF13-PA	2920	3-4,2
IECG 1500 VRF15-PA	2920	3-4,2
IECG 2000 VRF20-PA	4380	3-4,2
IECG 2000 VRF24-PA	4380	3-4,2
IECG 2500 VRF25-PA	5110	3-4,2
IECG 2500 VRF29-PA	5110	3-4,2


Dimensioner

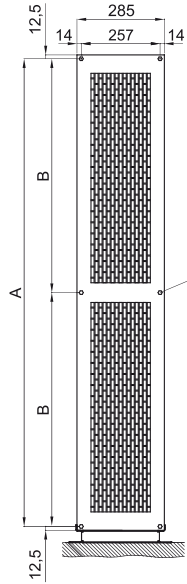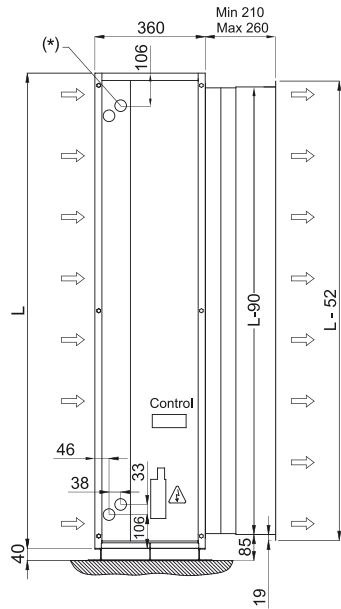

OPTIONAL  
Lateral water pipes entrance



Floor fixing points with foot



Standard Installation  
(Vertical left side)



Invisair	L	A	B
1500	1550	1525	762,5
2000	2055	2030	1015
2500	2555	2530	1265